

FIXED

Blade Servers | 7th Gen Core[®] or Xeon[®] E

The 1U fixed blade server is a compact, high-density solution carrying two fixed blades per chassis. Each blade houses its own CPU, memory, and networking capabilities to quickly process, retrieve, and transfer data in the face of ever-evolving workloads.



ENHANCED COMPUTE POWER

Increase computing power with two single-CPU blades, tackling demanding workloads to achieve exceptional processing capabilities.



SWAP-C OPTIMIZED

Consolidated computing power and maximum space utilization within a fixed blade architecture greatly reduce hardware costs while enhancing performance.



RUGGEDIZED FOR EXTREMES

Certified to the most stringent military and industrial standards, rapidly deploy reliable and resilient computing systems within harsh and austere environments.



Overview

1U chassis with two fixed, single CPU blades allow you to run multiple applications on the same piece of hardware to reduce compute footprint and total cost of ownership.

Dedicate and isolate resources for complex, evolving workloads to optimize performance in real-time. Each blade functions like a half-rack server, essentially giving you two systems in one!



SOLUTION HIGHLIGHTS



Multi-layer cybersecurity creates a secure computing platform while enhancing resilience against sophisticated cyberthreats.



Strict revision control is achieved through Trenton's approved vendor list (AVL), ensuring engineer-vetted parts.



In-house engineers (hardware, software, mechanical, and electrical) control the design of your system down to the board and chip level.



Five-year warranty means we will repair, replace, or refund for any potential defects in material, workmanship, and design.



Counterfeit Protection Program (CPP) helps Trenton detect, remove, and destroy counterfeit parts and components.



TAA compliance is achieved because Trenton manufactures PCIe Expansion Kits, and its other solutions, in the United States.




Lifetime support gives you unlimited access to our team of experts that help troubleshoot problems and offer solutions.



Vetted supply chain helps protect your system from potentially compromised counterfeit electronic parts and components.



CSfC, ITAR, ISO9001, and AS9100 adherence and compliance allow Trenton to consistently provide secure, high-quality computing solutions.

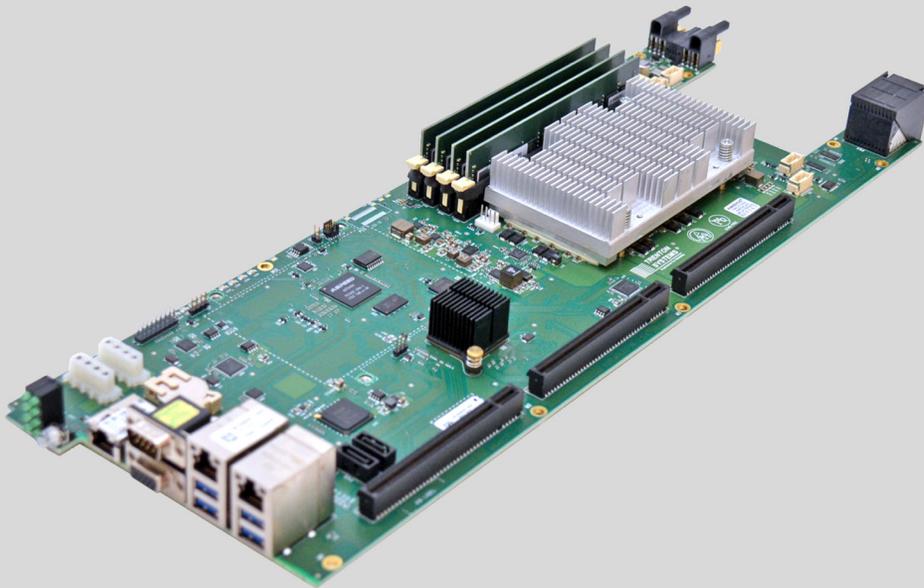

MBK8257 BOARD

Technical Overview

| SPECIFICATION | DETAILS |
|-------------------|---|
| CPUs | Single Intel® 7 th Gen Core® or Xeon® E (Kaby Lake), per blade |
| Memory | 4x DDR4-2400 ECC RDIMM slots |
| Storage | Up to 2x SATA, 4x M.2 NVMe SSDs, per blade (FIPS 140-2/3 available) |
| Form Factors | 1U rack server at 19" depth |
| Network Interface | 3x 1GbE ports, 1x supporting IPMI, per blade |
| PCIe Interconnect | 1x PCIe 3.0 x16 slot, 1x PCIe 2.0 x4 slot via riser card |
| Power | 1x 1200W, non-redundant, non-461, removable |

The Fixed Blade Servers can be customized to your most complex technical, performance, and environmental specifications in consultation with our team.

Contact us for pricing and availability.

770.287.3100 | info@trentonsystems.com

PROCESSORS (UP TO 4 CORES PER CPU, UP TO 8 TOTAL)

Single 7th Gen Intel® Core® or Xeon® E (Kaby Lake) up to 65 W
Chipset: Intel® C236 Sky Lake

MEMORY (UP TO 1.5 TB)

4x DDR4-2400 ECC RDIMM slots, single DIMM per channel

PCIe GEN 2/3 SLOTS (CAN SUPPORT FHFL GPUs)

1x PCIe Gen 3 x16 slot, 1x PCIe Gen 2 x4 slot via riser card

I/O

- ▶ **SATA:** 2x SATA ports
- ▶ **USB:** 6x USB3 ports
- ▶ **IPMI:** IPMI 2.0 with virtual media over LAN and KVM-over-LAN support
- ▶ **Graphics:** ASPEED AST2400 BMC
- ▶ **Video:** 1x VGA port
- ▶ **LAN:** 3x 1GbE RJ-45 ports, 2x driven from a dual Intel® i350 controller, 1x driven from a dual Intel® i210 controller (1x Shared IPMI)
- ▶ **Serial:** 1x RS232 serial port

SECURITY

▶ TPM 2.0

*For a comprehensive list of cybersecurity features, please contact one of our team members.

COOLING (BMC Controlled)

6x 4 pin system fan headers, 2x 4 pin CPU fan headers

SYSTEM BIOS

- ▶ InsydeH20 UEFI BIOS from Insyde
 - Plug and Play (PnP)
 - PCI 2.2
 - ACPI 1.0 / 2.0
 - USB Keyboard Support
 - SMBIOS 2.3
 - UEFI

SYSTEM MANAGEMENT (BMC)

ASPEED AST2400 baseboard management controller: rKVM, system monitoring, out-of-band management

OS COMPATIBILITY

- ▶ Windows Enterprise, Server
- ▶ Linux
 - RHEL
 - Ubuntu
 - SUSE

*Contact us for the full compatibilities list

DIMENSIONS

17.62 in. x 6.19 in. (44.76 cm x 15.72 cm)

ENVIRONMENTAL SPECIFICATIONS

- ▶ Operating Temperature: 0°C - 50°C
- ▶ Storage Temperature: -40°C - 70°C
- ▶ Operating Humidity: 8% - 90% non-condensing
- ▶ Non-Operating Humidity: 5% - 95% non-condensing
- ▶ Shock: 3 axis, 35g, 25ms
- ▶ Vibration: 4.76Grms, 10Hz to 2000 Hz (SSD)
- ▶ Altitude: 0 to 10,000 ft (3,048m)
- ▶ Non-Operating Altitude: 0 to 30,000 ft (9,144m)

*Preliminary numbers noted. Final numbers expected to outperform current specifications.
*Conformal coating available upon request.

COMPLIANCE

Designed to meet the following standards/certifications:

- ▶ MIL-STD-810H
- ▶ MIL-STD-1310
- ▶ MIL-STD-464C
- ▶ DO-160F
- ▶ 2014/35/EU (LVD)
- ▶ 2014/30/EU (EMC)

*Environmental specifications and compliance apply within Trenton 1U/2U chassis.

SYSTEM VARIATIONS

| # | SYSTEM | BLADES | BOARD | DEPTH | POWER | STORAGE | SLOTS |
|---|--------------|--------------------------------------|--------------------|---------|--|---|--|
| 1 | TRC1001 (1U) | UP TO 2X 1U, SINGLE -CPU BLADES | 8257 | 19" | 1X 1200W NON-REDUNDANT, NON-461, REMOVABLE | UP TO 4X M.2 NVME DRIVES VIA OPTIONAL RISER (PER BLADE) | --- |
| 2 | TRC1002 (1U) | 1X 1U, SINGLE-CPU BLADE | 8257 | 19" | 1X 1200W NON-REDUNDANT, NON-461, REMOVABLE | UP TO 2X FRONT-REMOVABLE SATA DRIVES | 1X FHFL PCIe 3.0 X16 AND 1X FHFL PCIe 2.0 X4 VIA RISER |
| 3 | 1U-2U | 1U AND 2U SINGLE- OR DUAL-CPU BLADES | COTS, MOTS, CUSTOM | 18"-28" | LOW/MID/HIGH WATTAGE, REDUNDANT OR NON-REDUNDANT, 461-OPTIONAL, FIXED OR REMOVABLE | SAS/SATA/NVME DRIVES (INTERNAL, FRONT-REMOVABLE, VIA RAID CONTROLLER, OR VIA RISER) | HALF-HEIGHT AND FHFL PCIe 3.0/4.0/5.0 |

If you need a different system variation not listed above, please contact a Trenton Systems engineer to configure a system or solution to your specific application or program requirements.